
Woodpeckers® ADJUSTABLE TRACK SQUARE

OWNER'S MANUAL

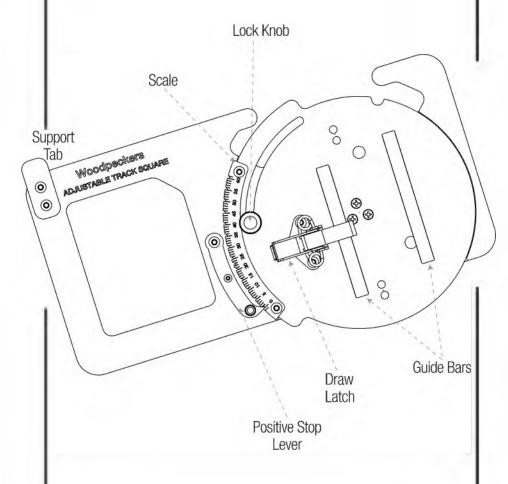


The **Woodpeckers' Adjustable Track Square** is compatible with the Festool, Makita, and Triton guide rails.

If you think you're missing anything, email us at mailroom@woodpeck.com.

You can also call us at 800-752-0725 from 9:00 a.m. to 5:00 p.m. EST Monday - Friday.

INSTALLING THE GUIDE RAIL

- 1. Slide your guide rail onto the right Guide Bar. FIGURE 1.
- 2. Ensure the guide rail makes 100% contact with the left Guide Bar. FIGURE 2/2-A.
- 3. Engage the Draw Latch and snap into place.

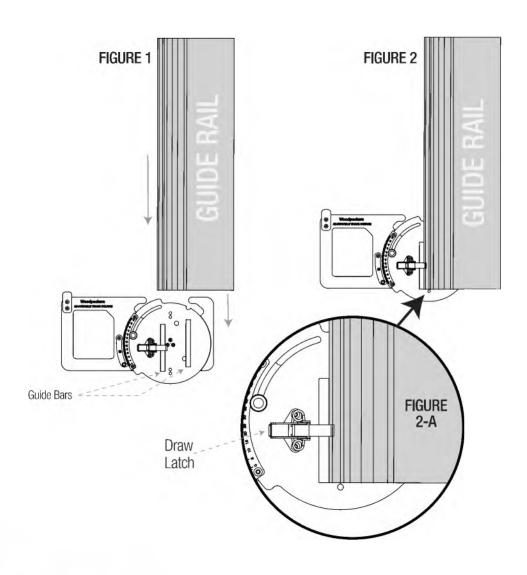


CHANGING ANGLES

- 1. Loosen the Lock Knob. Pull the Positive Stop Lever back, allowing movement of the Guide Rail. **FIGURES 3/3-A.**
- 2. Set the desired angle. Use the Positive Stop Lever to index any multiple of 5° or 22-1/2°. For settings between the detents, the Positive Stop Lever will point at the angle setting.
- 3. Secure the Lock Knob.


DUPLICATING AN ANGLE


- 1. Using the Adjustable Track Square and the guide rail, align the two edges of cut piece to be duplicated to the Adjustable Track Square and guide rail.
- Tighten the Lock Knob and move your Adjustable Track Square and guide rail to the new piece of material using the same steps above.
- 3. Make your cut.

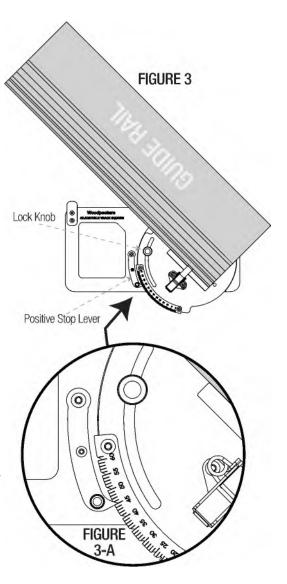

USING THE ADJUSTABLE TRACK SQUARE

- 1. Position the front edge of the Adjustable Track Square against the edge of your stock.
- 2. With the Guide Rail elevated above your stock, slide the Adjustable Track Square along the edge of your stock until the Guide Rail is aligned to your cut mark. **FIGURE 4/4–1.**
- 3. Lower the Guide Rail, confirm proper alignment of the front edge of the Adjustable Track Square with the edge of your stock and make your cut.

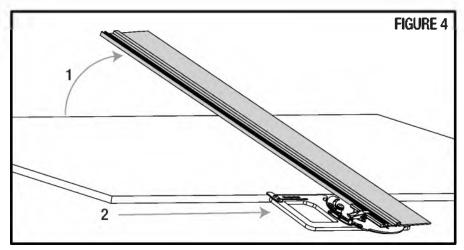

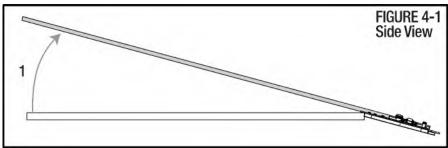

Woodpeckers®

PRECISION WOODWORKING TOOLS
Woodpeckers, LLC Strongsville, Ohio · **woodpeck.com**© 2019 Woodpeckers, LLC

